

MK702



Features:



- Soft start and soft stop
- Emergency release key in case of power failure
- Dual/Single gate running mode
- Adjustable opening/closing interval between master and slave gate
- Stop/Reverse in case of obstruction during gate opening/closing
- Built in adjustable auto-close
- Digital display indicates the running situation and setting menu.
- Reliable electromagnetism limit switch for easy adjustment
- Built in max Motor running time (MRT) adjustable for multiple safety protection.
- Can be equipment with a wide range of the accessories

Specification:

	MK702
Motor power of each actuator	30W 24VDC
Actuator speed	5/8" (20mm/s)
Actuator travel	15" (385mm)
Max. weight of per leaf	440lbs(200kgs)
Max. width of per leaf	11.8FT (3.6m)
Ambient temperature	-4F(-22 C) ~ +122F(+55 C)
Protection Class	IP44



MK702

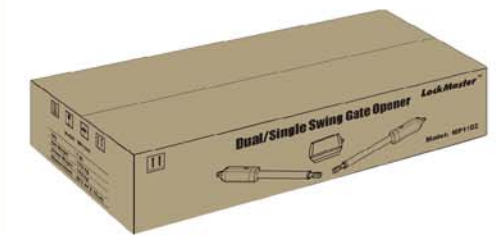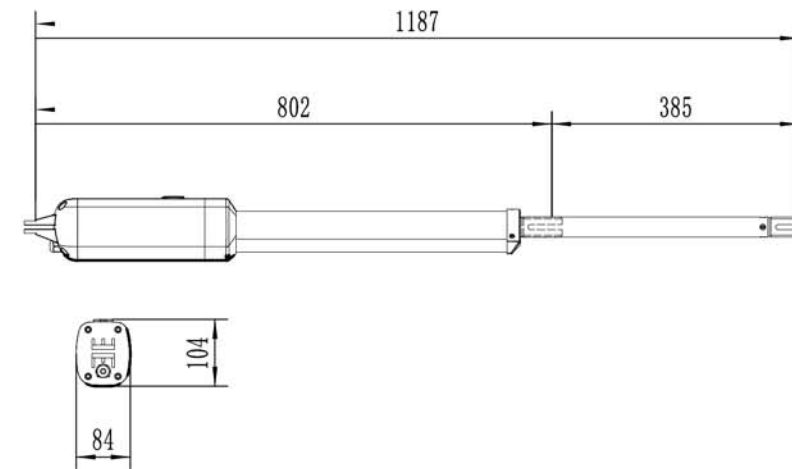

PACKAGE

Measurement: 90 x 28 x 20 CM

Shipping weight: 18.5 KGS

